



SIDE LAP

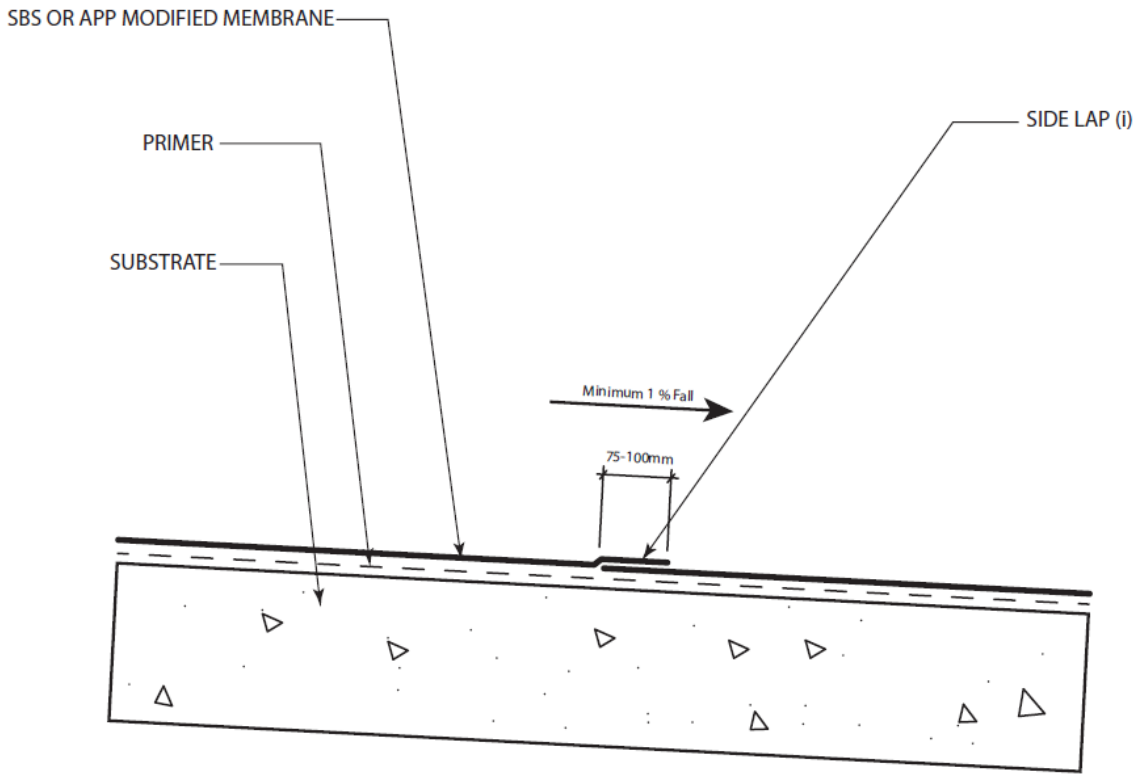

END LAP

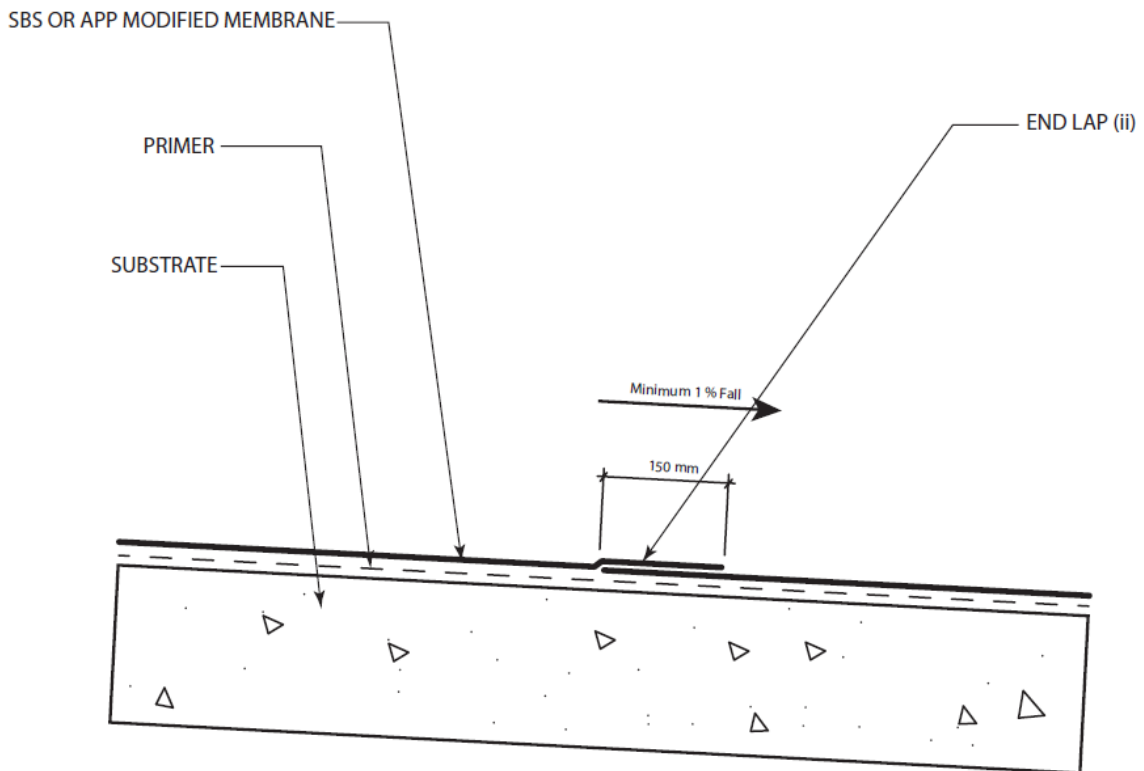

**SIDE LAP AND END LAP FULLY
ADHERED**

DRAWING: SOP-001

SCALE: Not to scale

EFFECTIVE DATE: 15-03-2019



Side Lap and End Lap Fully Adhered

Prior to Membrane Installation, Review the Data Sheet

Surface Prep

It is the contractor's responsibility to inspect all areas which are to receive the waterproofing membrane and report any unsatisfactory conditions to the main contractor. Refer to the technical data sheet for detailed specifications for preparing various substrates.

The surface to be waterproofed must be clean and sound. Remove all dust, dirt, laitance or any other contaminants which may hinder adhesion of the membrane.

Special Notes

See TDS for exact side lap dimensions.

If granular surface – **EMBED THE GRANULES**