

MANUAL SECTION	ISSUE DATE	AUTHORISED	REPLACES	PAGE
Flooring Adhesive	May 2010	PM	March 2007	1 of 1

## LOCKFAST SEAM

### DESCRIPTION:

A special purpose solvent based sealant used to greatly improve the lock of carpet fibres after cutting.

Features include:

- Fast dry time with no residual tack
- Non yellowing
- Water clear when dry

Strong bond

### PHYSICAL PROPERTIES:

Resin Type:	Resin in solvent base
Solvent:	MEK/Acetone
Appearance:	Clear thick liquid
Coverage:	20m/Lt approx.
Clean Up:	MEK Thinner
Packaging:	1 litre tin


### APPLICATION: Carpet Seams

Put Lockfast Seam contents into a carpet seam applicator bottle and cut nozzle accordingly.

Apply a coating of Lockfast Seam to the base of the freshly cut carpet seam. Concentrate application at the base of the carpet pile and the primary backing of the carpet.

DO NOT APPLY DIRECTLY TO and THROUGH the tops of the pile tufts. Allow to dry.

Then lay carpets together and hot tape the seam if appropriate.

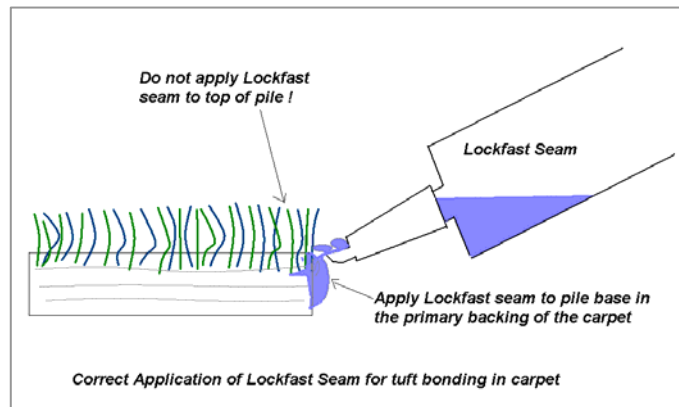

If applying to installed carpet, take great care not to get it on the tops of tufts where it will be visible.

### Stitch Sealant

Lay the sewn seams flat on a hard surface. Apply Lockfast Seam evenly with a brush, allowing it to penetrate and fill the thread holes.

Allow to become touch dry before applying a second coat.

### CAUTION:

- It will show a white mark if applied to the pile tuft tops.
- Solvent based flammable product.
- Keep off skin and eyes.
- Keep safely stored.
- Refer to Nuplex MSDS for more information.
- Work in a well ventilated environment.