

The use of Double bond heatbond tape to ensure safe and permanent bonding of carpet seams in double bond carpet installations

Nuplex have a broad range of heatbond tapes.

The DBPS grade is for the installation of carpet, over bonded underlay, is double bond adhesive applications.


Contractors often do not use heatbond tape in these situations. This is because they believe that the job is “adhesive glued” and therefore the carpet joint does not need joining.

Nuplex and many carpet companies believe these joints should be heatbond tape seamed as well.

DBPS stands for Double Bond tape with PS (pressure sensitive –sticky) underside.

Why use heatbond tape in these situations and advantages

- PS “sticky” backing ensures tape stays on the carpet join line; no movement.
- Allows placement and then adhesive application up to the edges of the tape without movement. Once the adhesive bonded the tape may be heat seamed.
- Prevents shifting of a pattern.
- Hot water injection cleaning is less likely to cause seams to open up.
- Heatbond tape will help reduce water penetration into the adhesive line and consequent degradation of the adhesive.

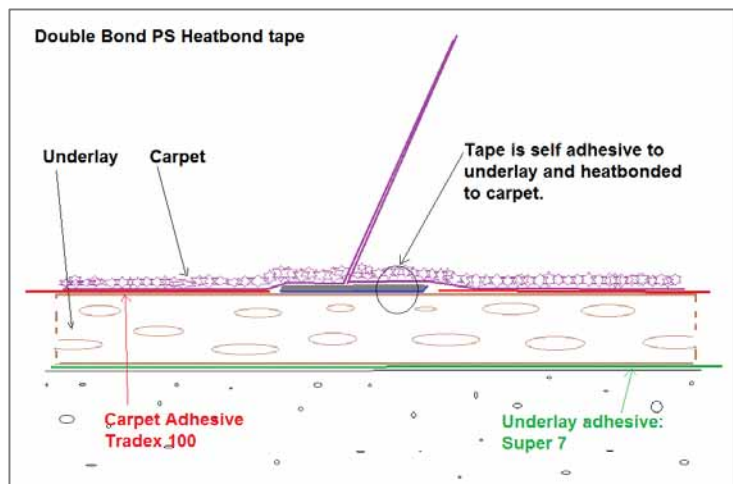

These products are manufactured in New Zealand by Nuplex Construction Products.

Freephone 0508-882288
Free Fax 0508-553344
Email: ncpsales@nuplex.co.nz

Web data: www.nuplexconstruction.co.nz