

## Table of Notch Diagrams



- Notches are listed in decreasing Minimum Spread Rate order as follows: Square notches (1–8); V notches with separations (9–15); V notches (16–18); U notches (19–29) and PC—no notches (30).
- The *Notch Sequence Table* (right) is an alphabetical Notch Diagram listing showing the corresponding numerical position in the *Table of Notch Diagrams* below.
- The *Legend* (far right) describes the information associated with each notch.

**To order a specific trowel:** Replace (notch) in the trowel series number with 2, 3 or 4 character Notch Designation. For example, order No. 9CTB-U for a 9-series trowel with CTB notch and Ultigrip handle.

## Notch Sequence Tables

Notch	Position	Notch	Position
ACT	9	MLN	5
AVF	21	MP	4
BHF	12	MSM	29
BSN	8	PAR	13
CTB	6	PC	30
CWM	17	PNK	14
DCW	15	PRB	3
DGD	25	PRC	2
DGR	23	QT	7
FCA	1	RCA	10
FFA	20	U445	26
FOW	11	U446	27
KBC	24	U448	28
KTA	22	WHA	19
MFT	18	WS	16

## Legend

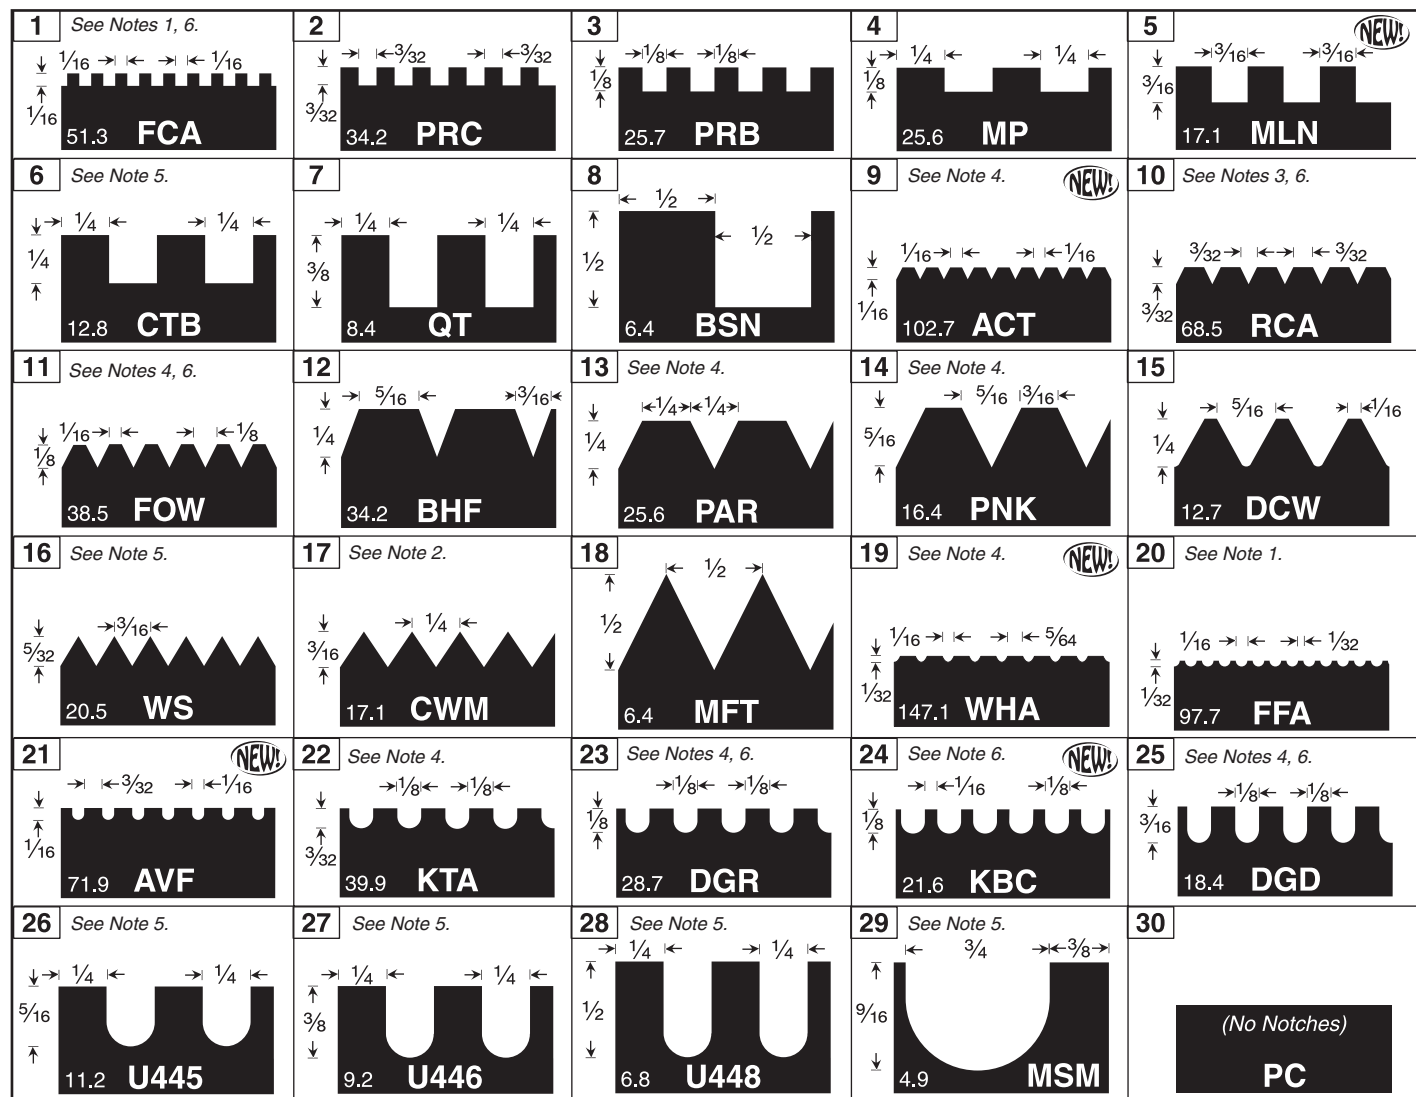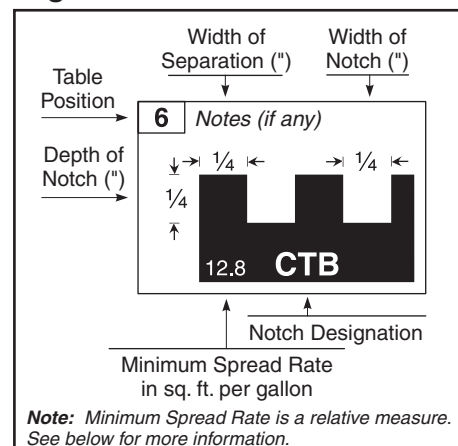

All notch diagrams are shown full size with fractional inch dimensions.

The number in the lower left hand corner of each notch diagram is the Minimum Spread Rate, a relative measure in square feet per gallon. The spread rate will be greater (same adhesive over a larger area, or less adhesive over the same area) if the trowel is held at an angle of less than 90° to the floor, or if the notches have been worn.

### Notes:

- The Nos. 1022-X, 16X, 16X-U, 3X, 4X, 4X-U, 9X, 9X-AH, 9X-BS, 9X-BS-U, 9X-LH, 9X-LH-U and 9X-U (where 'X' represents either the FCA or FFA notch) Trowels have a 10° angled leading edge.
- The Nos. 9CWM-LH and 9CWM-LH-U Trowels have a 10° angled leading edge.
- The Nos. 16RCA, 16RCA-U, 9RCA, 9RCA-AH, 9RCA-BS, 9RCA-BS-U, 9RCA-LH, 9RCA-LH-U and 9RCA-U Trowels have a 10° angled leading edge.

- The Nos. 16X, 16X-U, 9X and 9X-U (where 'X' represents either the ACT, DGD, DGR, FOW, KTA, PAR, PNK or WHA notch) Trowels have a 10° angled leading edge.
- The CTB, MSM, U445, U446, U448 and WS notches are approved for use in specific tile installations by the NTCA (National Tile Contractors Association, Inc.) Technical Committee.
- The DGD, DGR, FCA, FOW, KBC and RCA notches are recommended by The Carpet and Rug Institute Standards CRI 104 and CRI 105 in the absence of a specific recommendation from the carpet manufacturer and/or adhesive supplier.