

# Technical Data Sheet

## SOPRALENE FLAM JARDIN



### DESCRIPTION

**SOPRALENE FLAM JARDIN** is a flexible SBS elastomeric bitumen waterproofing membrane with a non-woven polyester reinforcement. The topside is protected by slate chippings and the underside is covered by a thermofusible film.

**SOPRALENE FLAM JARDIN** bitumen mass contains anti-root penetration properties for green roofs and complies with EN 13948 (FLL procedure).

### MANUFACTURE OF MATERIALS

All materials shall be produced supplied or specified by Allnex New Zealand Ltd. To avoid incompatibility of component materials it is essential that Allnex technical staff be consulted before any product other than those specified is used.

### SYSTEM DESCRIPTION

Sopralene Jardin is available in a light coloured, root-repellent granule finish. The system may be installed as follows:

#### Double Layer only

**Sopralene flam 180** torched directly to substrate. **Sopralene Jardin** is torched directly onto the prefixed Sopralene Flam180. *Complies with Membrane Group Code of Practice.*

Jardin double layer is elastomeric and will elongate or contract with minor building movements and stay flexible over a long period of time. This will provide positive, long term waterproofing durability

### SURFACE PREPARATION

It is the contractor's responsibility to inspect all areas which are to receive the waterproofing membrane and report any unsatisfactory conditions to the main contractor. Listed below are detailed specifications for preparing various substrates. The surface to be waterproofed must be clean and sound. Remove all dust, dirt, laitance or any other contaminants which may hinder adhesion of the membrane.

### VENTILATION

It is important that membrane roof structures are vented to prevent condensation build up and subsequent damage. Ventilate between roofing framing and to the exterior. Specific designs and advice are available. Ridge vent caps are an effective solution.

### ROOF SLOPE

This Soprasun double layer roofing system will fully waterproof a flat roof. (However the New Zealand Building Code requires a 1.5° slope. 1:40). Very low pitched roofs will pond unless care is taken with roof substrate preparation and attention to detail is applied to the sheet layout to prevent water ponding behind laps. In roof gardens with flat bases a chased channel will assist in preventing water build-up. The Jardin system will waterproof water standing areas.

### CONCRETE

Any hollows shall be filled and ridges ground smooth (use Allnex FLC). Surface must be free of any spalled areas, loose aggregate and sharp protrusions. Outside corners must be free of sharp edges. Substrate must be dry. The use of Allnex Aquaguard 101 is an option to isolate damp concrete. Aerisol Flam ventilation sheet is recommended (with vents) to control moisture being emitted from the concrete substrate. This is applied under the membrane sheets. Control joints shall be treated as specified by architect, engineer and approved by membrane manufacturer. For suggestions see "detailing" on Allnex website.

### BLOCKWORK


Sopralene Jardin system may be applied to smooth concrete block substrates.

Any pointed blockwork must be flushed out.

If blockwork is rough a well adhered coat of Allnex FLC may be used to achieve a smooth substrate.

### VENTILATION

Ventilation to the full roof cavity must be provided to prevent moisture build up in the cavity. The vented area should be below the ply but above any insulation. Side vents on opposite sides of the building are preferred with full cross ventilation designed into the structure. Distances exceeding 10m should have separate roof vents.



## OTHER

Any other substrate or areas with existing waterproofing membranes please refer to Allnex New Zealand Ltd for advice.


## APPLICATION

All products shall be applied by approved contractors.

## DOUBLE LAYER INSTALLATION

Apply Allnex Membrane Primer at a spreading rate of 5m<sup>2</sup>/litre. To all interior and exterior corners hot torch apply a 100mm Sopralene Flam 180 fillet. Hot tool chamfer all edges. Install expansion joints (in the ply) to allow for plywood movement. The position of the joints will be specified by the roofing engineer. An Allnex double layer roofing system will tank a fully flat roof (0° pitch). (However the NZ Building Code does stipulate a minimum 1.5° (1:40) roof pitch.) Allnex state that a double layer system is waterproof and will hold and resist ponding water. Protrusions/Vents: Install and/or waterproof these as per Allnex detailing. Ensure double layers (minimum) of membrane are installed. To main roof area hot torch apply a layer of Sopralene Flam 180 with 75mm wide side laps and 100mm end laps. Hot tool chamfer all edges. To parapets and upstands hot torch apply Sopralene Flam 180 extending lap over main roof areas by at least 75mm. hot torch apply second layer of Sopralene Jardin to first layer ensuring that all laps are staggered. Hot torch apply second layer of Sopralene Jardin to all parapets and vertical upstands extending laps over main roof area at least 100mm. Any terminations to vertical surfaces are to be finished under a flashing which is mechanically fixed and sealed with Elastothane 230 polyurethane sealant.

**Protection:** Roof garden membranes (Jardin) should be protected from physical damage by the installation of protection sheets, fibre cement or polystyrene. Etc. The Jardin will not allow root penetration but it must be protected from damage during gardening. The contract should clearly outline the responsibilities of the waterproofer and the garden installation team.

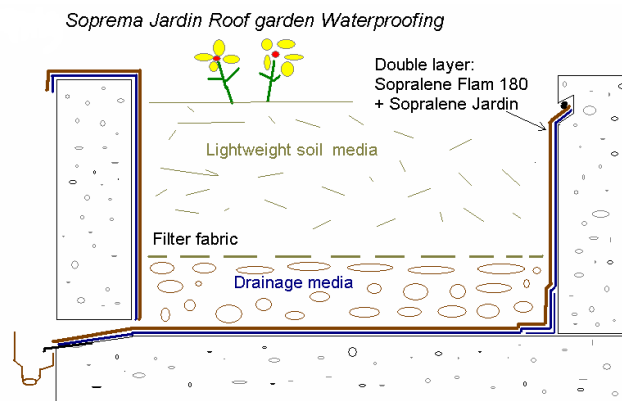

## DETAILS

Detail for upstands, penetrations, gutters, inlets, outlets etc are on our website. The details are all compliant with E2 AS1 (detail sections 8.5.) however the Allnex membrane system is in double layer form.

## WARRANTY

A warranty of 20 years is applicable to double layer Sopralene membrane systems. This is in excess of the 15 year warranty required by law.

This warranty covers the performance of the membrane itself and does not warrant against excessive building movement.

Only double layers systems are covered by the warranty. This applies to new work in accordance with the Building Code and E2/AS1.

## MAINTENANCE

Roof gardens and planters are subject to damage from gardening work. These damages must be avoided. Regular inspections are to be carried out to identify any areas of damage. These are to be repaired by apply a patch of Jardin.

## PRODUCER STATEMENT

Sopralene Jardin System is provided by Soprema as suitable as an exterior roof cladding in the New Zealand environment. As such it is compliant with the New Zealand Building Act. A 20 year warranty is supplied. Double layer Sopralene Jardin is an alternative solution with the requirements of E2/AS1 July 2005.

*Allnex New Zealand Ltd are a founding member of the Membrane group Code of Practice for Torch-on membranes.*



## SPECIAL INDICATIONS

### Hygiene, health and environment:

The product does not contain any substance likely to be detrimental to health or to environment and complies with generally admitted Health and Safety Requirements. For more information, please refer to relevant Safety Data Sheet.

## Quality control:

**SOPREMA** has always attached the highest importance to Quality Control.

For this reason, we operate an independently monitored Quality Assurance System in compliance with **BS EN ISO 9001:2000**, certified by **BSI Management System**.

## PACKAGING

	SOPRALENE FLAM JARDIN
Roll dimensions	8mx1m
Roll weight	about 35 kg
Storage	Upright on pallet with plastic wrapping, protected against moisture

Roll lengths are given with a tolerance of < 1 %. Width of roll is given with a tolerance of 1% (UEAtc).

Rolls must be stored upright on flat ground. Pallets may be stacked to a maximum height of two pallets with separating layer.

During storage, protect the rolls against moisture. In cold weather, we recommend that the rolls be kept at a minimum temperature of + 2°C (+ 36 °F) for at least 5 hours before installation

## COMPOSITION

Properties	SOPRALENE FLAM JARDIN
Reinforcement	Non-woven polyester (200 g/m <sup>2</sup> )
Binder	Elastomeric bitumen*: blend of selected bitumen and SBS thermoplastic polymers
Thickness	3,2 mm (on overlap) 3,9 mm on slates
Topside	Slate chippings
Underside	Thermofusible film
Overlap	≥ 6cm

## CHARACTERISTICS

**SOPRALENE FLAM JARDIN** is a flexible membrane for roof waterproofing and complies with EN 13707, thereby bearing the CE standard marking. General information concerning the CE marking, expressed in MLV, can be found below. For more information, please refer to the relevant Declaration of Conformity.

Properties	Standards	SOPRALENE FLAM JARDIN
Classification for external fire exposure	EN 13501-5	NPD
Reaction to fire	EN 13501-1	E
Tensile Strength in longitudinal direction	EN 12311-1	800 N/ 5cm
Tensile Strength in transversal direction	EN 12311-1	550 N/ 5cm
Elongation in longitudinal direction	EN 12311-1	40 %
Elongation in transversal direction	EN 12311-1	40 %
Low temperature flexibility	EN 1109	- 16°C
Flow resistance at high temperature	EN 1110	100°C
Flexibility, after ageing test	EN 1109, EN 1296	0°C
Heat resistance, after ageing test	EN 1110, EN 1296	90°C
Static puncture resistance	EN 12730	20 kg
Choc resistance	EN 12691	1500 mm
Tear resistance in longitudinal and transversal directions	EN 12310-1	150 N
Shear resistance of joints	EN 12317-1	500 N / 5cm
Peeling resistance of joints	EN 12316-1	100 N / 5cm
Watertightness	EN 1928	Conform
Resistance to root penetration	EN 13948	Conform

SOPRALENE FLAM JARDIN also complies with EN 13969, confirmed by the CE marking, according to Certificate of Factory Production Control n° 0679-CPD-0131 and 134. (All values are nominal)

## CERTIFICATIONS

### BRANZ Appraisal No: (819) 2014

SBS (Styrene Butadiene Styrene) is suited for more extreme climates, such as New Zealand's Climate Zone 3 (South Island and North Island's volcanic plateau).

Sopralene Flam SBS Waterproofing Membranes have been assessed as roof waterproofing membranes on buildings within the following scope:

- The scope limitations of NZS 3604:2011 and NZBC Acceptable Solution E2/AS1, Paragraph 1.1; or,
- The scope limitations of NZBC Acceptable Solution E2/AS1, Paragraph 1.1 with regards to building height and floor plan area when subject to specific structural design; and,
- Situated in NZS 3604:2011 Wind Zones, up to and including Extra High; and,
- With substrates of plywood or suspended concrete slab.

### New Zealand Building Code (NZBC)

These products will, if employed in accordance with the supplier's installation and maintenance requirements, assist with meeting the following provisions of the building code:

- Clause B1 Structure: Performance B1.3.1, B1.3.4, B1.3.4(b), B1.3.4(c), B1.3.4(d), B1.3.4(e)
- Clause B2 Durability: Performance B2.3.1, B2.3.1(b)
- Clause E2 External moisture: Performance E2.3.1, E2.3.2, E2.3.7, E2.3.7(b), E2.3.7(c)
- Clause F2 Hazardous building materials: Performance F2.3.1



Date: June 2018  
Replaces: April 2006

#### Allnex Construction Products, a Division of Allnex New Zealand Ltd

Auckland - 14 Industry Road Penrose phone: 095836544. Hamilton - 18 Somerset Street Frankton phone: 07-847-8658  
Wellington - 19A Jamaica Drive Grenada North phone: 04-240-0305. Christchurch - 112 Carlyle Street Sydenham phone: 03-366-6802  
Customer Service: 0508-882-288 [cs.constructionnz@allnex.com](mailto:cs.constructionnz@allnex.com)  
[www.allnexconstruction.com](http://www.allnexconstruction.com)

**DISCLAIMER:** This information appearing in this Document (**Details**) concerning the product which is the subject of the Document (**Product**) is either based on present technical knowledge and tests done by allnex or tests done by, and data supplied from third parties including you, the customer. Since the actual use by you and by others of the Product is beyond the control of allnex, no warranty or representation, express or implied is made by allnex regarding the suitability for such use, nor does allnex accept any liability arising out of the use by you of other products or materials, whether third party or not, that may be referred to in this Document. allnex recommends that you carry out your own tests as to the suitability of the Product for your purpose, regarding which you accept full responsibility. In addition, if any of the Details appearing in the Document are based upon tests done by, and/or data supplied by any third party, allnex provides no warranties or representations in connection with those Details and you, the customer waives any right you may have against allnex in connection with the accuracy, completeness or otherwise of the Details. The information in this Document is not to be construed as absolutely complete or accurate since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations affecting use of the Product. allnex does not provide any warranty or representation to you that the Product does not infringe the intellectual property rights of any third party. All orders accepted shall be subject to the standard conditions of sale of allnex which are on the back of our invoice. In accepting the Product you, the customer acknowledge and agree: **a.)** The Product is or may be of a hazardous nature and that you, the customer, are responsible for the disposal of the container housing the Product in accordance with the requirements and regulations of the relevant supervising government. **b.)** The Product has a limited shelf life and must be stored strictly in accordance with the guidelines and specifications related to it. **c.)** Where the Details relate to Product tested by allnex, those Details are indicative only, regarding which there may be batch to batch variation. **d.)** allnex gives no warranty or representation as to the applicability for the particular use by you, the customer, of the Product and you the customer shall be responsible for ensuring that the Product is fit for your intended use. **e.)** allnex's liability for breach of any term, condition, guarantee or warranty (express or implied) and concerning the information in this Document or the Product more generally) including any liability for direct or indirect consequential loss (including indirect loss of profits), is limited to the maximum extent permitted by law and, at allnex's election, to either replacing or repairing the goods or paying the cost of replacing or repairing the goods, or in the case of services, supplying the services again.