Technical Data Sheet

BITUSTIK 4000



Double sided, self-adhesive, cold applied, waterproofing tape for membrane detailing and sealing

Description

BITUSTIK™ is a flexible self-adhesive tape coated on both sides with Bituthene rubber bitumen adhesive and reinforced with a fibreglass mesh, to provide excellent adhesion to most building substrates. It is fully compatible with GCP waterproofing membranes.

Applications

- General purpose, double sided waterproof sealing strip for non-exposed applications
- For use as a detailing aid with BITUTHENE®, PREPRUFE®, NPX Drainage and Protection Board or as a bedding strip for Serviseal waterstops.

Installation

Minimum application temperature +5°C for BITUSTIK™ Standard and -5°C for BITUSTIK™ 4000.

Concrete surfaces must be smooth, clean and dry. Use BITUTHENE® Primer S2 applied evenly by roller or brush to improve adhesion, particularly on dusty substrates, and allow to dry.

BITUSTIK™ is simply applied by peeling away the silicone release paper and applying one side of the adhesive face to the prepared substrate and roll firmly to ensure complete adhesion without creases or voids. Roll ends and cut edges should be overlapped

50 mm minimum and rolled firmly to ensure a watertight seal.

Once the first adhesive face has been applied and rolled, peel off the second release paper and apply the other material (WATER-BAR™ PVC waterstops, PREPRUFE® or BITUTHENE® membranes, NPX Drainage and Protection Board).


Specification

BITUSTIK $^{\text{TM}}$ Standard / BITUSTIK $^{\text{TM}}$ 4000 to be applied in accordance with the manufacturer's instructions.

Health and Safety

There is no legal requirement for a Safety Data Sheet (SDS) for BITUSTIK™ Tapes. For health and safety questions on these products please contact Allnex Construction Products.

For BITUTHENE® Primer S2, read the product label and Safety Data Sheets before use. Users must comply with all risk and safety phrases. SDS's can be obtained from GCP Applied Technologies or from our web site at gcpat.com.

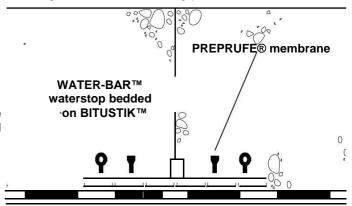

Details shown are typical illustrations only and not working drawings. For assistance with working drawings and additional technical advice please contact Allnex Construction Products.

Supply		
BITUSTIK Standard		
Thickness	1.5mm nominal	
Roll Sizes	150mm X 12m long	Weight 3.5Kg
	240mm X 12m long	Weight 5.5Kg
BITUSTIK 4000 / 4000HC		
Thickness	1.5mm nominal	
Roll Sizes	150mm X 12m long	Weight 3.5Kg
	240mm X 12m long	Weight 5.5Kg
Ancillary Products		
Bituthene B2 Primer	18.9L Pail	
Coverage	6-8m² L	
Lap Roller	Unit	
Storage	Store in original packaging in dry conditions between 5°C and 30°C	

Equipment by others: Stanley knife or similar, hand roller. Roller or brush for primer.



allnex

Date: July 2018 Replaces August 2017

Allnex Construction Products, a Division of Allnex New Zealand Ltd

Auckland - 14 Industry Road Penrose phone: 095836544. Hamilton - 18 Somerset Street Frankton phone: 07-847-8658

Wellington - 19A Jamaica Drive Grenada North phone: 04-240-0305. Christchurch - 112 Carlyle Street Sydenham phone: 03-366-6802

Customer Service: 0508-882-288 cs.constructionnz@allnex.com

www.allnexconstruction.com

